

**NEW**

## Specification

Power supply	12~24VDC (Ripple voltage: +/-10%)
Current consumption	40mA or less (without load)
Ambient temp. range	At operation: 0~50°C, at storage: -10~60°C (without due condensation and freezing)
Ambient humidity range	At operation & storage: 35~85%RH (without freezing)
Protective structure	IP40


Details

CAD data

## Feature


Easily viewable LCD dual displays. High level visibility with 3-color display. 30mm x 30mm square pressure sensor.

- 2-color indication depending on output.  
Main display: Pressure value (red or green)  
Sub display: Setting value (orange)

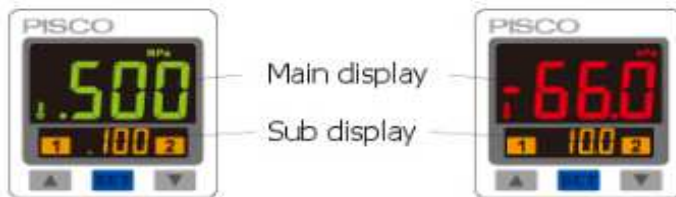

- Compact body size  
Body size: Compact as 30mm width & 30mm height

■ Opening dimension for mounting multiple sensors ■ Dimensions after mounting

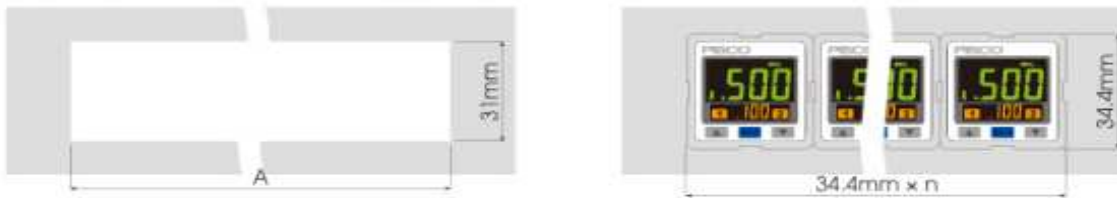

\* Calculation formula:  $(A) = (34.4 \times n) - 3.4$  where 'n' equals to the number of sensors

- Power consumption is reduced by 20% compared to SED-30  
SED-30: 50 mA  $\Rightarrow$  SED-31: 40 mA
- Connector cable is equipped.  
Easy attachment / detachment of cable to the display unit is possible.
- Locking function is built-in  
Locking function prevents accidental output when pushing the key mistakenly.  
Key icon is indicated when the function is active.

